



VM EXTENSION AMPLIFIER 360W

VM-3360E
(CE/CE-GB)

DESCRIPTION

The VM-3360E is a multifunctional amplifier that can be mounted in an EIA-Standard equipment rack (3-unit size). The unit comes with the speaker output section which has an internal attenuator and 6-output selector. In addition, the unit features the surveillance function which automatically checks the system for failures.

SPECIFICATIONS

Power Source	230 V AC, 50/60 Hz
Power Consumption	850 W (with rated output signal), 380 W (according to EN62368-1)
Rated Output	360 W
Frequency Response	50 Hz – 20 kHz, ± 3 dB (at 1/3 rated output)
Distortion	0.7 % or less (at rated output, 1 kHz)
S/N Ratio	85 dB or more
Input	Local input: -50 dB* (MIC)/ -10 dB* (LINE) (changeable), $600\ \Omega$, electronically balanced, removable terminal block (14 $\times$ 2 pins) External amplifier input: 100 V line, removable terminal block (14 pins)
Output	Speaker output 1 – 2: Max. (360 W) per output Speaker output 3 – 6: Max. (120 W) per output Speaker output 1 – 6: Total within 360 W, removable terminal block (14 pins) Allowable minimum load: $500\ \Omega$ (20 W) at 100 V line for speaker line failure detection Direct output: Direct output from internal or external amplifier, removable terminal block (16 pins)
VM Link	Input: Connecting the VM-3240VA or VM-3360VA, RJ45 female connector Output: Connecting the VM-3240E or VM-3360E, RJ45 female connector Maximum distance: 800 m (874.89 yd) Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)
EXT PA Link	Connecting the VP-2421, RJ45 female connector Maximum distance: 5 m (16.4 ft) Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)
General Control	Input 1 – 8: No-Voltage make contact input, open voltage: 24 V DC, short-circuit current: 2 mA or less, removable terminal block (14 $\times$ 2 pins) Output 1 – 8: Isolated open collector output, withstand voltage: 30 V DC, operating current: 10 mA or less, removable terminal block (14 $\times$ 2 pins)
Emergency Control	Input 1 – 5: No-Voltage make contact input, open voltage: 24 V DC, short-circuit current: 2 mA or less, RJ45 female connector Input 6: Isolated voltage input, Inactive: $-24\text{ V} \pm 20\%$, Active: $+24\text{ V} \pm 20\%$, RJ45 female connector Status out: Relay contact output, withstand voltage: 40 V DC, operating current: 2 – 300 mA, RJ45 female connector
ATT Control	Relay contact 1–6, 125 V AC or 30 V DC, total under 5 A, removable terminal block (16 pins)
Power Input/Output	Power in: Connecting the VX-2000DS only (operating range: 20 – 40 V DC) PS out: 28 V DC/24 A M4 screw terminal, distance between barriers: 11 mm (0.43")
DC24V Output	24 V DC, Maximum feeding current 0.3 A
Ds Link	Connecting the VX-2000DS, RJ45 female connector Maximum distance: 5 m (16.4 ft) Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)
Operating Temperature	$-5\text{ }^{\circ}\text{C}$ to $+45\text{ }^{\circ}\text{C}$ ($23\text{ }^{\circ}\text{F}$ to $113\text{ }^{\circ}\text{F}$)
Operating Humidity	5 % to 95 %RH (no condensation)
Finish	Case: Surface-treated steel plate, black, paint Panel: Aluminum, hairline, black
Dimensions	482 (W) $\times$ 132.6 (H) $\times$ 407 (D) mm (18.98" $\times$ 5.22" $\times$ 16.02")
Weight	19 kg (41.89 lb)
Accessory	Power cable (2 m (6.56 ft)) $\times$ 1, Link cable (3 m (9.84 ft)) $\times$ 2, Removable terminal plug (14 pins) $\times$ 3, Removable terminal plug (16 pins) $\times$ 1

Rear View

AC plug

Diagram of the rear panel of the VM-3000S receiver, showing various inputs, outputs, and controls.

POWER IN 24V

SP. OUTPUT 100V LINE

FLUZE 250V T 6.3A L

230V 50/60Hz 360W

VI-3000S ONLY

PS OUT

TURN ON EMERGENCY UPDATE

VM EXTENSION AMPLIFIER

MODEL VM-3000S SE

OUTPUT RATED 360W

120A COMPRESSOR

ENGINEERED IN JAPAN, MADE IN CHINA

CE 04-16

0409/09/09

LOCAL INPUT

LOCAL INPUT NO.

SW 2 SW 3 SW 4 SW 5 SW 6

OFF LINE NORMAL OFF OFF OFF OFF

ON MC EMERGENCY A1 A2 A3 A4 A5

SW 7 FIRMWARE

SW 8 COME

EMERGENCY CONTROL IN 2 IN 1

STATUS DIS LINK

EMERGENCY

PA LINK

LAN

LINK/ACT FD

EXTRA LINK



LINK OUT

LINK IN

LOCAL IN LINK IN

LOCAL INPUT

LOCAL INPUT


[illegible]

Front View

37.7 [1.48"]

57.2 [2.25"]

465 [18.31"]

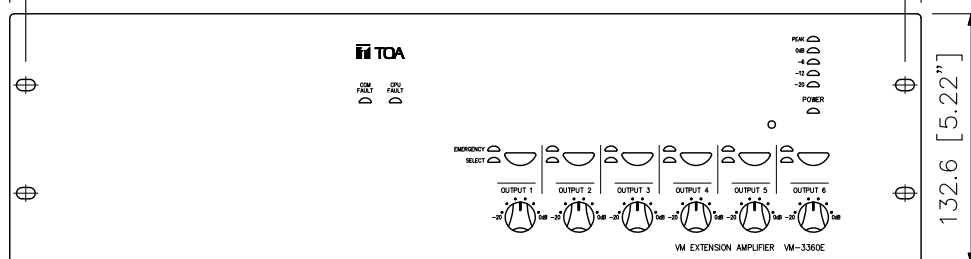


132.6 [5.22"]

Side View

370 [14.57"]

19 [0.75"]

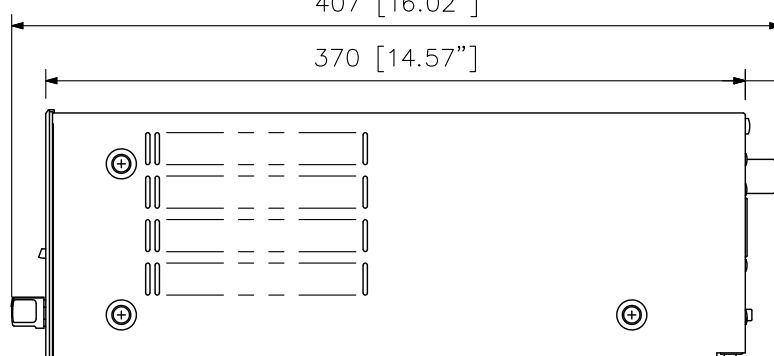

UNIT:mm SCALE:1/4